


AIRTAME 2

TECHNICAL SPECIFICATIONS

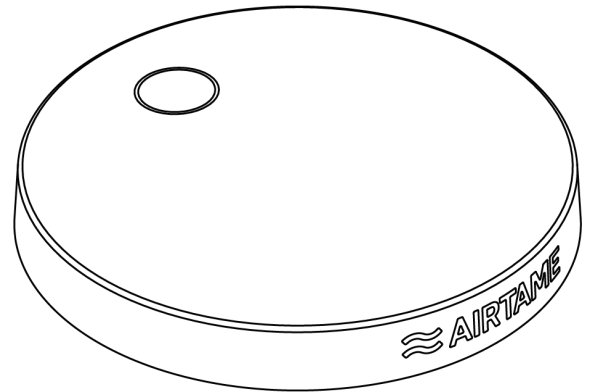

Device specifications

Hardware	Processor: NXP Dual Core+ 1GHz ARM (i.MX6DP) GPU: Vivante GC2000, four shader cores @594MHz RAM:4 x 512Mb (64 bit Data Bus) Storage: eMMC WiFi: Cypress (Broadcom) CYW89342 RSDB* 2.4/5.2 GHz 2x2 MIMO	*Real Simultaneous Dual Band
System	Airtame OS based on Linux	
Screen connections	HDMI 1.4b / VGA* / DVI*	*With external adaptor
Output resolutions	1920 x 1080 (up to 60Hz progressive mode) 1280 x 720 (up to 60 Hz)	
Audio	Stereo 192Kb (48.000Hz)	
Frame rate	Up to 60fps @ 1080p	
Input resolutions	Up to 4K*	*scaled to Full-HD
Wireless	IEEE 802.11a/b/g/n/ac WPA2-PSK/WPA2-EAP/Open	
Max theoretical speed	2.4GHz: 150Mbps 5.2GHz: 866.7Mbps	
Wireless reach	20m* (60ft)	*Dependant on environment
Connections	Expected: 0.7 - 1A @ 5V* Max: 2.4A @ 5V**	*Using USB Ethernet Adaptor adds 0.2A **0.25A @ 48V when using PoE
Power consumption	Expected: 0.4-1A @ 5V* Max: 1.5A @ 5V	Expected: 0.7 - 1A @ 5V* Max: 2.4A @ 5V**
Ambient operating temperature	5 °C to 30 °C (41 °F to 86 °F)	

Dimensions	Ø: 77.90 mm (3.07 inch) H: 13.50 mm (0.53 inch)	
Warranty	Limited min. 1 year* standard	*May vary depending on region
Lock	Kensington Lock Slot	
Device identifier	Serial number, Visible on device and packaging	
NIC-ID (MAC address)	Visible online, visible on device, visible on packaging	

System Requirements

Supported Operating systems (for Airtame application)	Windows, Mac OS, Chromebook, Linux, Android, Airplay	
System Minimum (for Airtame application)	System: Dual Core processor RAM: 2GB RAM WiFi: 802.11g OS: Windows 7, Ubuntu 15.04, Mac OS X 10.11, iOS 9, Android 4.2.2	
System Recommended (for Airtame application)	CPU: Dual Core processor from 2013 or later (Core M3/5, Core i3/5/7/9 or similar) RAM: 4GB RAM WiFi: 802.11n/ac OS: Windows 10, Ubuntu 15.04, Mac OS X 10.14, iOS 12, Android 4.2.2	
Router Recommendation	2.4/5.2 GHz 802.11bg/n/ac MIMO 2x2 300 MBit	
Supported streaming source	Windows, Mac OS, Chromebook, Linux, Airplay, Android	

Generated October 2018

Technical specifications are subject to change without prior notice.

Please check airtame.com for the latest information.

www.airtame.com

info@airtame.com