




Airtame Go

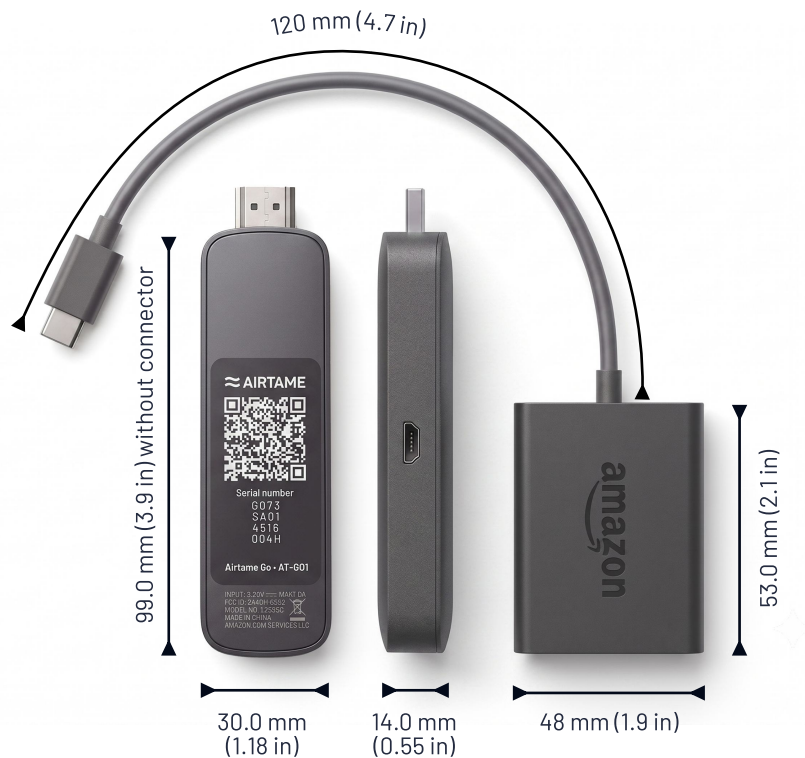


Turn every **screen** into a **communication tool**

Airtame Go makes it easy to share your screen, display signage content, and send emergency alerts without switching inputs or plugging in extra cables. The device connects to any display via HDMI and **comes with an Ethernet adapter included** for a stable, wired setup.

Built for classrooms and shared spaces, Airtame Go gives you full **screen sharing**, cloud-managed **signage**, and **remote management** in one affordable package. **Manage every screen centrally** through Airtame Cloud, push updates, and schedule content across locations.



Screen sharing



Digital signage




Remote management




Emergency alerts

Software specifications

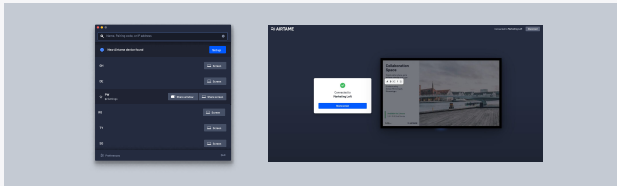


Screen sharing

- Screen share from any device, Laptop, tablet, or phone
- Share browser tab, window, or whole screen
- Share directly from the browser without an app
- Native protocols (Miracast, AirPlay)
- Video and Audio sharing

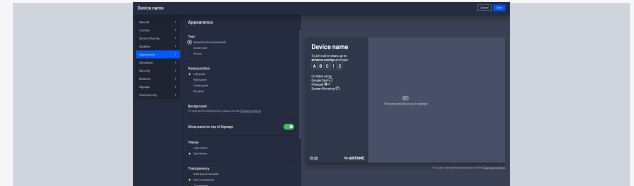


Digital signage

- Make playlists of 3rd party signage content
- Integrations to Google Slides, PowerPoint, Canva, Power BI, and many more
- Customize the home screen with meeting room status and instructions for sharing
- Schedule content to appear at certain times
- Support vertical aspect ratios

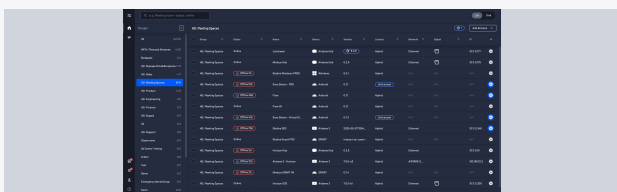

Remote management

- Access Airtame screens from anywhere in the world
- Schedule power management and automatic firmware updates
- Troubleshoot signage using live view of the screen
- Organize Airtame screens in groups
- Receive device alert when devices go offline

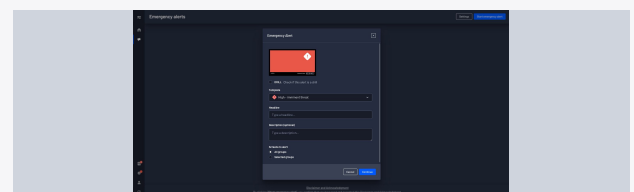

Emergency alerts

- Interrupt screens sharing and signage
- Supported with APIs for easy integration to CAP and custom setups
- Already works with Raptor, CrisisGo, InformaCast, Omnilert, and more.
- Show custom "All clear" messages when the emergency is over
- Trigger using Airtame Cloud

Hardware specifications

Model Number: AT-G01-CORE-3Y

Interface

Processor	Quad-core SoC
WiFi:	Wi-Fi 6E Tri-band: 802.11 a/b/g/n/ac/ax (2.4GHz, 5GHz, and 6GHz)
Bluetooth:	5.2 + BLE
Ethernet:	Supported via included Amazon Ethernet Adapter in the box

Software

Operating system:	Android Based
Device management:	Airtame Cloud

Memory & storage

Memory:	2 GB LPDDR4
Storage:	16 GB

Audio/Video

Supported Resolutions:	2160p at 24/25/30/50/60 Hz, 1080p, 720p
Video output:	Up to 4K Ultra HD
Display support:	EDID (Extended Display Identification Data) supported

Power input

Micro-USB: Uses standard Micro-USB DC power supply

Ports

HDMI	1 x HDMI 2.1 Output
Micro-USB	1 x Micro-USB

Security

Device security: Secure boot, data encryption, automatic OTA (Over-the-Air) updates

Device dimensions

Signage stick: 30.0 x 14.0 x 99.0 mm, (1.18 x 0.55 x 3.90 in)

Warranty

Hardware: 3 years

Amazon Ethernet adapter spec

Ports:	1x RJ45 Ethernet Port, 1x Micro-USB (female for power)
Interface/Connector	Micro-USB (male)
Ethernet speed:	10/100 Mbps (Fast Ethernet)
Dimensions:	5.3 x 4.8 x 1.5 cm (2.1 x 1.9 x 0.6 in)
Cable length:	12 cm (4.7 in)

Package dimensions

North America:	242 x 130 x 25 mm, (9.5 x 5.1 x 1.0 in)	Rest of the world:	160 x 130 x 64 mm, (6.3 x 5.1 x 2.5 in)
----------------	---	--------------------	---

What's in the box

Signage Stick	Ethernet adapter	Remote control	2AAA batteries	Regional power adapter	Power cable	HDMI extender	User manual
							